




2.4~6.0 GHz Bi-directional Amplifier

Item#SHR58602-OEM
OEM Version

This wide band bidirectional amplifier works from 2.4GHz thru 6GHz, including Military band of 4.4GHz. The unit offers high speed switch circuit to allow high speed data radios. The peak transmit power of this amplifier is 41dBm.

For OFDM radios, the peak power goes down for better EVM.

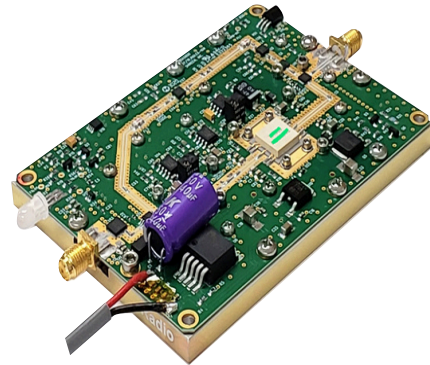


Specifications

Electrical:

Operating Range	2400-6000MHz
Operating Mode	TDD, Time Division duplex,
Transmit Peak Power	41dBm +/- 1
Transmit Gain	16dB +/- 2 (28dB optional)
Transmit input Power	-2dBm min 20dBm max
Receive Gain	20~22dB
T/R Switching speed	< 1 μ s
Noise Figure	\leq 5 dB
LED indicators	Red for Receive (Default mode) Green for Transmit
Power Consumption	130mA Rx, 2.0A Tx @28VDC
Operating Temp	-40 °C to + 70 °C

Mechanical:

Outdoor CNC machined Al enclosure:	
Dimension	4.6 x 2.8 inch, 0.8" high
Weight	6.15 Oz

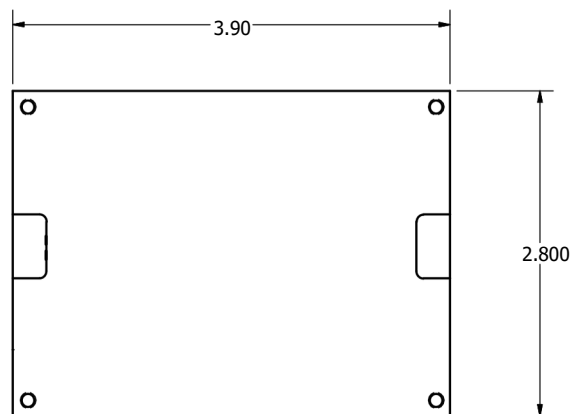

All amplifier products are entirely made in USA.

